

RESU10H

9.8kWh Battery Pack Product Specification

RESU10H

Solaredge compatible


Electrical Characteristics		
Total Energy		9.8 kWh @25°C (77°F)
Usable Energy¹⁾		9.3 kWh @25°C (77°F)
Voltage Range	Charge	400 ~ 450 VDC
	Discharge	350 ~ 430 VDC
Absolute Max. Voltage		520VDC
Max. Charge/Discharge Current		11.9A@420V / 14.3A@350V
Max. Charge/Discharge Power²⁾		5kW
Peak Power (only discharging)³⁾		7kW for 10 sec.
Peak Current (only discharging)		18.9A@370V for 10 sec.
Communication Interface		RS485
DC Disconnect		Circuit Breaker, 25A, 600V rating
Connection Method		Spring Type Connector
User interface		LEDs for Normal and Fault operation
Protection Features		Over Voltage / Over Current / short circuit / Reverse Polarity
Scalability (Total Energy, Max. Charge/Discharge Power, Peak Power (only discharging))		Max. 2 in parallel (19.6 kWh @25°C (77°F), 6.6KW, 7kW for 10 sec.)
Operating Conditions		
Installation Location		Indoor(Wall-Mounted) / Outdoor
Operating Temperature		14 ~ 113°F (-10 ~ 45°C)
Operating Temperature (Recommended)		59 ~ 86°F (15 ~ 30°C)
Storage Temperature		-22 ~ 131°F (-30 ~ 55°C)
Humidity		5%~95%
Altitude		Max. 6,562ft (2,000m)
Cooling Strategy		Natural Convection
Certification		
Safety	Cell	UL1642
	Battery Pack	UL1973 / CE / RCM / TUV (IEC 62619)
Emissions		FCC
Hazardous Materials Classification		Class 9
Transportation		UN38.3 (UNDOT)
Ingress Rating		IP55

- ※ Test Conditions - Temperature 25°C, at the beginning of life
- ※ Total Energy is measured under specific condition from LGC(0.3CCCV/0.3CC)
- ※ DC/DC Discharge Efficiency 94.5%

- 1) Value for Battery Cell Only (Depth of Discharge 95%), 2kW charge/discharge power.
- 2) LG Chem recommends 3.3kW for maximum battery lifetime
- 3) Peak Current excludes repeated short duration (less than 10 sec. of current pattern).

RESU10H**Solaredge compatible**

Mechanical Characteristics		
Dimensions	Width	744 mm (29.3")
	Height	907 mm (35.7")
	Depth	206 mm (8.1")
Weight	97 kg (214lbs)	

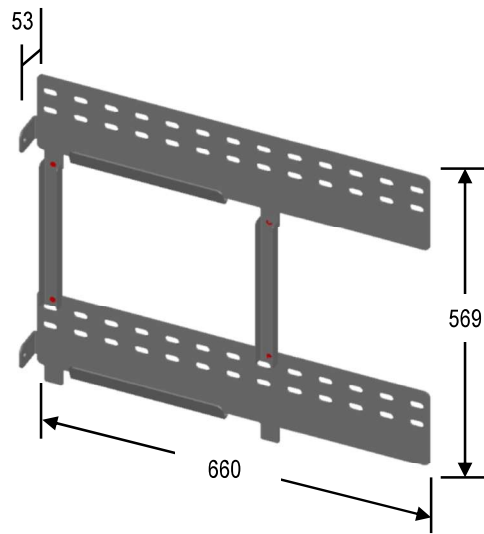

SolutionPartner



HQ: LG Twin Towers 128, Yeoui-daero, Yeongdeungpo-gu, Seoul, Korea. 150-721
TEL : (82) 2-3773-1114 FAX : (82) 2-3773-7005
<http://www.lgesspartner.com> <http://www.lgchem.com>